

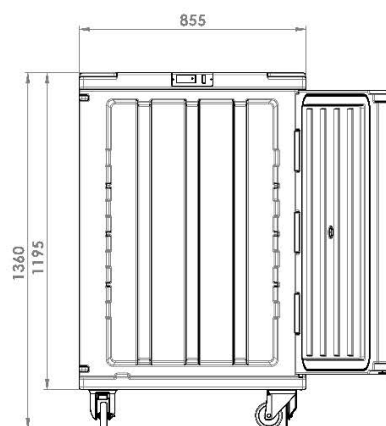


FRIGORIFERO PORTATILE IN REGIME ATP 495 LITRI APERTURA FRONTALE




PORTABLE REFRIGERATED CONTAINER ATP 495
LITERS FRONT OPENING

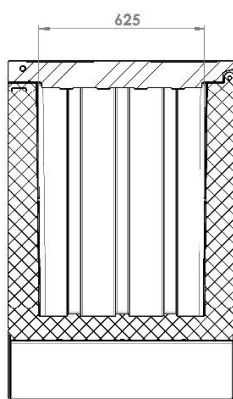

DISEGNI TECNICI TECHNICAL DRAWINGS

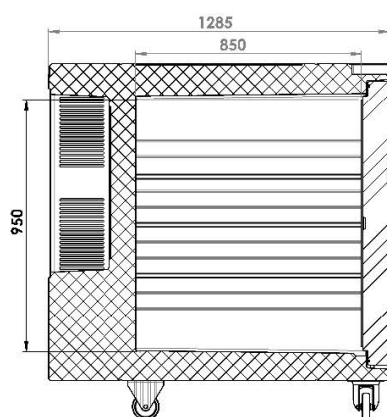

Modello statico
Static model

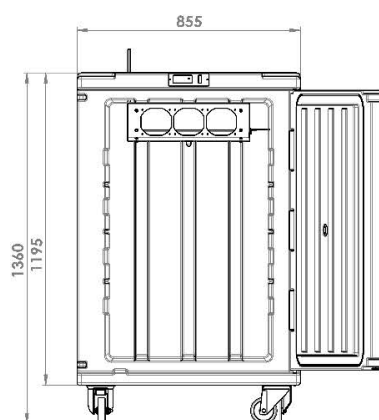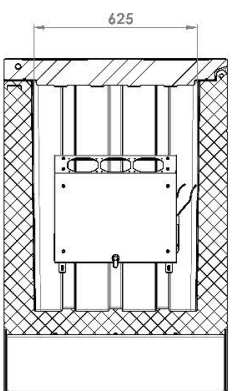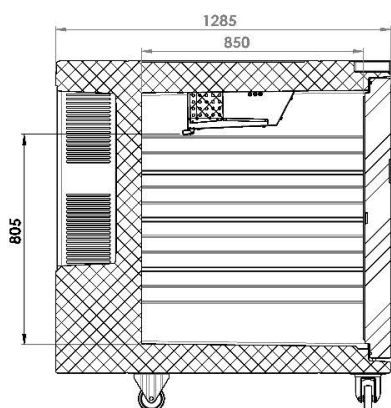

Modello ventilato
Fan-assisted model

Modelli senza ruote <i>Models without wheels</i>						
Codice <i>Code</i>	Modello <i>Model</i>	Assorbimento nominale <i>Nominal absorption</i>	Fusibili <i>Fuses</i>	Dim. esterne / interne LxPxH mm <i>External/internal dim. LxWxH mm</i>	Capacità lt <i>Volume lt</i>	Peso kg <i>Weight kg</i>
IS00470	Ventilato -25°C /+10°C <i>Fan-assisted -25°C /+10°C</i>	1A a 230Vac 25A a 12Vdc (300 W)	4A per 230Vac 30A per 12Vdc	855x1285x1195 625x850x805	430	129
IS00471	Ventilato -25°C/+40°C <i>Fan-assisted -25°C /+40°C</i>	1A a 230Vac 25A a 12Vdc (300 W)	4A per 230Vac 25A per 12Vdc	855x1285x1195 625x850x805	430	129
IS00472	Statico 0°C /+10°C <i>Static 0°C /+10°C</i>	0,62A a 230Vac 12A a 12Vdc (150 W)	4A per 230Vac 25A per 12Vdc	855x1285x1195 625x850x950	520	119
IS00473	Statico 0°C /+40°C <i>Static 0°C /+40°C</i>	0,62A a 230Vac 12A a 12Vdc (150 W)	4A per 230Vac 25A per 12Vdc	855x1285x1195 625x850x950	520	119

Modelli con ruote <i>Models with wheels</i>						
Codice <i>Code</i>	Modello <i>Model</i>	Assorbimento nominale <i>Nominal absorption</i>	Fusibili <i>Fuses</i>	Dim. esterne / interne LxPxH mm <i>External/internal dim. LxWxH mm</i>	Capacità lt <i>Volume lt</i>	Peso kg <i>Weight kg</i>
IS00474	Ventilato -25°C /+10°C <i>Fan-assisted -25°C /+10°C</i>	1A a 230Vac 25A a 12Vdc (300 W)	4A per 230Vac 30A per 12Vdc	855x1285x1360 625x850x805	445	135
IS00475	Ventilato -25°C/+40°C <i>Fan-assisted -25°C /+40°C</i>	1A a 230Vac 25A a 12Vdc (300 W)	4A per 230Vac 25A per 12Vdc	855x1285x1360 625x850x805	445	135
IS00476	Statico 0°C /+10°C <i>Static 0°C /+10°C</i>	0,62A a 230Vac 12A a 12Vdc (150 W)	4A per 230Vac 25A per 12Vdc	855x1285x1360 625x850x950	520	125
IS00477	Statico 0°C /+40°C <i>Static 0°C /+40°C</i>	0,62A a 230Vac 12A a 12Vdc (150 W)	4A per 230Vac 25A per 12Vdc	855x1285x1360 625x850x950	520	125

Accessori <i>Accessories</i>			
Codice <i>Code</i>	Modello <i>Model</i>	Dim. LxPxH mm <i>Dim. LxWxH mm</i>	Peso kg <i>Weight kg</i>
IS0047G	Griglia in acciaio inox <i>Stainless steel grid</i>	643x835x16	4,7